





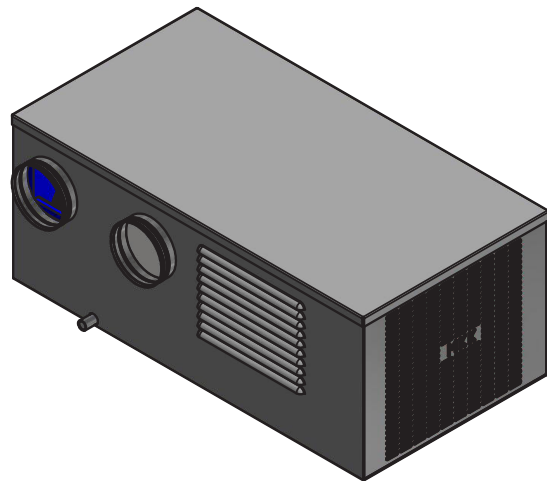

AC 350/250C

AC units for multiple industrial uses

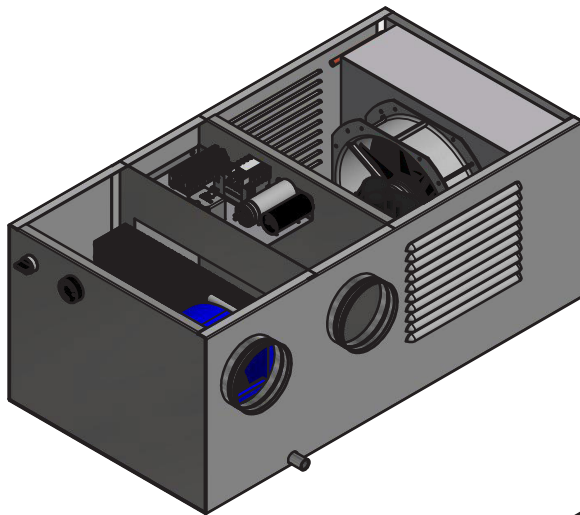

Lensegata 12
8656 Mosjøen, Norway

Tel: +47 751 13 090
Fax: +47 751 13 091

www.mkk.ac
post@mkk.ac

Company no.
876 035 502 MVA/VAT

AC 350/250C

AC units for multiple uses



In brief

AC 350C and 250C is a compact AC-system which is developed for multiple uses. The system is compressed as much as possible due to easy and multiple mounting option. With the possibility for only recirculated air or fresh air, these units could be used in everything from electro containers to personnel cabins. AC 350C and 250C is built with use of stainless steel AISI 304, and quality components, to ensure high performance regardless of external influence and environment.

Options like weather protection cap, external temperature sensor and controller, combined with evaporator in CU/AL with epoxy paint or CU/CU, and condenser in CU/CU, make these AC units suitable for mounting outside every cabin or electro room regardless of environment.

Product data

Height:	352 mm
Width:	455mm
Length:	865 / 670 mm
Weight:	45 Kg
Power:	230V

Fan capacity evaporator	500 m ³ /h
Power consumption max	8,6 A
Cooling capacity	3,5 / 2,5 kW
Fill amount	1200 / 1000 gr
Refrigerant	R-134A
Evaporating temperature	5°C
Condensing temperature	+40°C

